

PRODUCT DATASHEET

LED WORKLIGHT R-STAND SOCKET 20 W 4000 K

WORKLIGHTS R-STAND SOCKET (GEN 2) | Flexible, portable worklight with included power outlets



AREAS OF APPLICATION

- Outdoor use (IP44)
- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- 2 in 1, worklight and multisocket
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Equipped with two power outlets, for loads up to 3000 W
- Power outlet protected by self-closing cover
- Built-in switch to control the light, power outlets remain constantly powered
- Quick-release fastener for adjustment of luminaire head angle
- 3 m cable with type E/F plug



TECHNICAL DATA

Electrical data

Nominal wattage	20.00 W
Operating mode	Mains voltage
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	4000 K
Color rendering index Ra	≥80
Light color (designation)	Cool White
Luminous flux	1700 lm
Luminous efficacy	85 lm/W

Light technical data

Beam angle	120 °
-------------------	-------

Dimensions & weight

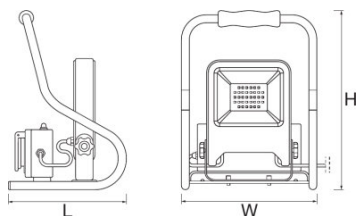

Length	224.0 mm
Width	227.0 mm
Height	278.0 mm
Product weight	1810.00 g

Colors & materials

Body material	Aluminum/Steel
Product color	Dark gray
Housing color	Dark gray
Cover material	Glass

Temperatures & operating conditions

Ambient temperature range	-20...+45 °C
----------------------------------	--------------

Lifespan

Number of switching cycles	100000
-----------------------------------	--------

Additional product data

Mounting type	Standing
Mounting location	Floor

Capabilities

Dimmable	No
Adjustable	Yes
Type of connection	Protective contact Plug type
LED module replaceable	Not replaceable

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE/EAC/REACH/ROHS

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075321304	Folding carton box 1	232 mm x 240 mm x 294 mm	1925.00 g	16.37 dm ³
4058075321311	Shipping carton box 4	495 mm x 244 mm x 610 mm	8287.00 g	73.68 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.